

Yealink

SIP-T57W

PRIME BUSINESS PHONE TO DELIVER OPTIMUM DESKTOP PRODUCTIVITY



Especially designed for busy executives and professionals, Yealink SIP-T57W is an easy-to-use Prime Business Phone with an adjustable 7-inch multi-point touch screen that you can not only easily and flexibly find the comfortable viewing angle according to the personal and environmental needs, but also get a rich visual presentation and easy navigation with just one-touch. With the built-in Bluetooth 4.2 and the built-in dual band 2.4G/5G Wi-Fi, the SIP-T57W IP Phone ensures you to keep up with the modern wireless technology and take the first chance in the future wireless age. Its built-in USB 2.0 port allows for USB recording or a direct wired/wireless USB headset or up to three Yealink EXP50 expansion modules connection. Benefitting from these features, the Yealink SIP-T57W is a powerful and expandable office phone that delivers optimum desktop efficient and productivity.

KEY FEATURES AND BENEFITS

Outstanding User Experience

Yealink SIP-T57W IP Phone features an adjustable 7-inch capacitive touch screen that you can readily adjust it to the comfortable viewing angle according to yourself. In addition, clearly defined set of menus is easy to navigate through when all you have to do is touching the desired option, that ensuring you an optimized interface for a smartphone-like user experience.

HD Audio

The SIP-T57W is coupled with the latest version of Yealink Optimal HD Voice technologies, including Yealink Acoustic Shield technology, that effectively eliminate background distractions and noises, deliver crystal clear voice even in a noisy environment. Meanwhile, complying with the latest Hearing Aid Compatibility (HAC) Regulations, its HAC handset helps the person who is with hearing loss to hear the voice more clearly.

- 7" 800 x 480 capacitive adjustable touch screen
- Adjustable LCD screen
- Dual firmware images
- T53/T53W/T54W/T57W firmware unified
- Built-in Bluetooth 4.2
- Built-in dual band 2.4G/5G Wi-Fi (802.11a/b/g/n)
- USB 2.0 port for USB recording, wired/wireless USB headsets and EXP50
- Up to 16 VoIP accounts
- Dual-port Gigabit Ethernet
- PoE support
- HAC Handset
- Paperless label design
- Wall mountable



7-INCH
MULTITOUCH
SCREEN



ADJUSTABLE
SCREEN



CORDED-
CORDLESS
PHONE



CONTENT
SHARING



OPUS
CODEC



HD AUDIO



BLUETOOTH



WIFI



USB 2.0

YEALINK SIP-T57W



Wireless Transmission

Yealink SIP-T57W IP Phone not only furnish you with the built-in Bluetooth 4.2 for Bluetooth headsets and mobile contacts synchronization, but also the built-in dual band Wi-Fi for Wi-Fi connectivity, allowing you to access the 5G Wi-Fi connectivity handily. Also if you want to expand your horizons for busy environments, or, share one phone system with your small team by adding multiple handsets, just simply turn your IP phone to the corded-cordless phone via DECT technology. Moreover, the IP phone can function with Yealink VC Desktop together to share content from your laptop, making collaboration much easier than before.

High Expandability

A built-in USB 2.0 port allows you to enjoy USB call recording via USB flash drive. Via this USB port, you also can connect wired/wireless USB headset without connecting Yealink EHS36 anymore, and connect up to 3 Yealink expansion modules EXP50 which can be programmed with up to 180 paperless DSS keys.

YEALINK SIP-T57W SPECIFICATIONS

Audio Features

- › HD voice: HD handset, HD speaker
- › Hearing aid compatible (HAC) handset
- › Acoustic Shield
- › Smart Noise Filtering
- › Audio codec: Opus, G.722, PCMU (G.711A), PCMA (G.711μ), G.729, G.729A, G.729B, G.729AB, G.726, G.723.1, iLBC
- › DTMF: In-band, Out-of-band (RFC 2833) and SIP INFO
- › Full-duplex hands-free speakerphone with AEC
- › VAD, CNG, AEC, PLC, AJB, AGC

Phone Features

- › 16 VoIP accounts
- › One-touch speed dial, hotline
- › Call forward, call waiting, call transfer
- › Mute, DND, call hold, redial, call return, auto answer
- › Group listening, SMS, emergency call
- › 10-way conferencing
- › Direct IP call without SIP proxy
- › Ring tone selection/import/delete
- › Set date time manually or automatically
- › Dial plan, XML Browser, Action URL/URI
- › RTCP-XR (RFC3611), VQ-RTCPXR (RFC6035)
- › Built-in dual band Wi-Fi:
 - Network standard: IEEE802.11a/b/g/n
 - Transmission rate: Up to 433Mbps (dynamic)
 - Frequency range: 2.4GHz/5.0GHz
- › Built-in Bluetooth for:
 - Bluetooth headset,
 - Mobile contacts synchronization
 - Bluetooth call
 - Simultaneous connection of one headset and one mobile phone
- › USB port (2.0 compliant) for:
 - › Wired/wireless USB headset
 - › USB call recording through USB flash drive
 - › Color-screen expansion modules EXP50 (up to 3)

- › Wireless Headset Adapter EHS40
- › USB/Bluetooth connectivity to Yealink CP900/CP700 speakerphone, USB connectivity to Yealink UH36 headset:
- › Basic functions: Answer / end, call mute
- › Enhanced function: audio optimization, redial, call hold, volume synchronization, multiple calls control
- › Content Sharing (via Yealink VCD)
- › Enhanced DSS key

Directory


- › Local phonebook up to 1000 entries
- › Black list
- › XML/LDAP remote phonebook
- › Smart dialing
- › Phonebook search/import/export
- › Call history: dialed/received/missed/forwarded Corded-Cordless Phone (via DECT Dongle DD10K)
- › Up to 4 DECT cordless handsets
- › Up to 4 concurrent calls
- › Support Yealink W52H/W53H/W56H/DD Phone/CP930W
- › Slave Handset for Master Deskset

IP-PBX Features

- › Busy Lamp Field (BLF), Bridged Line Appearance (BLA)
- › Anonymous call, anonymous call rejection
- › Hot-desking, voice mail
- › Flexible seating, Executive and Assistant
- › Call park, call pickup
- › Centralized call recording, call recording

Display and Indicator

- › 7" 800 x 480 capacitive adjustable touch screen
- › LED for call and message waiting indication
- › Dual-color (red or green) illuminated LEDs for line status information
- › Wallpaper
- › Intuitive user interface with icons and soft keys
- › Multilingual user interface
- › Caller ID with name, number and photo
- › Screensaver
- › Power saving

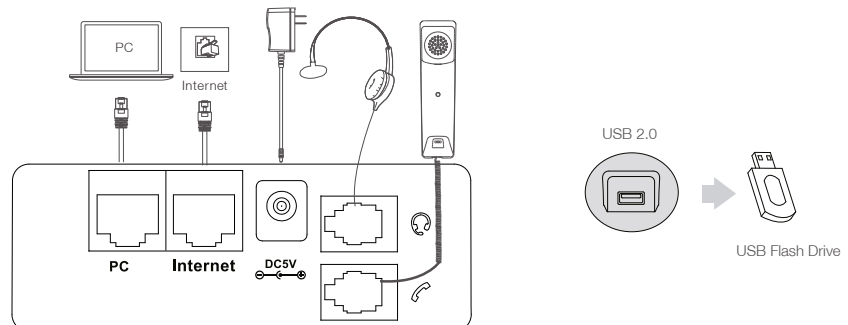

YEALINK SIP-T57W



Feature keys

- › 29 one-touch DSS keys
- › 7 feature keys: hold, transfer, message, headset, mute, redial, speakerphone
- › Volume control keys
- › Illuminated mute/headset/hands-free speakerphone key

Interface

- › Dual-port Gigabit Ethernet
- › Power over Ethernet (IEEE 802.3af)
- › 1 x USB port (2.0 compliant)
- › 1 x RJ9 (4P4C) handset port
- › 1 x RJ9 (4P4C) headset port

Management

- › Configuration: browser/phone/auto-provision
- › Auto provision via FTP/TFTP/HTTP/HTTPS for mass deploy
- › Auto-provision with PnP
- › Broadsoft device management
- › Zero-sp-touch, TR-069
- › Phone lock for personal privacy protection
- › Reset to factory, reboot
- › Package tracing export, system log

Network and Security

- › SIP v1 (RFC2543), v2 (RFC3261)
- › Call server redundancy supported
- › NAT traversal: STUN mode
- › Proxy mode and peer-to-peer SIP link mode
- › IP assignment: static/DHCP
- › HTTP/HTTPS web server
- › Time and date synchronization using SNTP
- › UDP/TCP/DNS-SRV(RFC 3263)
- › QoS: 802.1p/Q tagging (VLAN), Layer 3 ToS DSCP
- › SRTP for voice
- › Transport Layer Security (TLS 1.3)
- › HTTPS certificate manager
- › AES encryption for configuration file (AES256)
- › Digest authentication using MD5/MD5-sess
- › OpenVPN, IEEE802.1X, L2TP VPN
- › IPv6, LLDP/CDP/DHCP VLAN, ICE
- › WPA2/WPA3
- › Secure boot
- › GARP (Generic Attribute Registration Protocol)

Other Physical Features

- › Color: Classic Grey
- › Wall mountable (optional)
- › External Yealink AC adapter (optional): AC 100~240V input and DC 5V/2A output
- › USB output current: 5V 500mA
- › Power consumption (PSU): 3.2W-6.3W
- › Power consumption (PoE): 4.0W-7.8W
- › Dimension (W*D*H*T): 259.4mm*220mm*211mm*44.5mm
- › Operating humidity: 10~95%
- › Operating temperature: -10~50°C (+14~122°F)

Package Features

- › Package content:
 - Yealink SIP-T57W IP phone
 - Handset with handset cord
 - Ethernet Cable
 - Stand
 - Quick Start Guide
 - Power Adapter (Optional)
- › Qty/CTN: 5 PCS
- › N.W/CTN: 8.86 kg
- › G.W/CTN: 9.79 kg
- › Giftbox size: 324 mm*293 mm*128 mm
- › Carton Meas: 680 mm* 303 mm*342 mm

Compliance



NEC and the NEC logo are trademarks or registered trademarks of NEC Corporation that may be registered in Japan and other jurisdictions. All trademarks identified with © or TM are registered trademarks or trademarks of their respective owners. Models may vary for each country, and due to continuous improvements this specification is subject to change without notice. Please refer to your local NEC representative(s) for further details.

Americas (U.S., Canada, Latin America)

NEC Corporation of America

For further information please contact:

My Tel Pros
(984) 201-2000
sales@mytelpros.com
www.mytelpros.com