

# Yealink CP925



## Yealink

## TOUCH-SENSITIVE HD IP CONFERENCE PHONE

- 4-inch multi-touch screen with 480x800 resolution
- Optimal HD audio, full duplex technology
- Yealink Noise Proof Technology
- 20-foot (6-meter) and 360-degree voice pickup
- Built-in 6-microphone array for voice pickup
- Built-in 1-microphone array for noise cancellation
- Power over Ethernet
- 5-way conference call
- Built-in Wi-Fi (2.4GHz/5GHz, 802.11a/b/g/n)
- Built-in Bluetooth 4.2

**Yealink CP925 is a touch-sensitive HD conference phone** designed for small to medium conference room. CP925 adopts a business and introverted design that perfectly matches the calm style of the conference room, but also a acoustics fabric, which is impervious to any accidental liquid spills. Its fingerprint-proof LCD screen with a clear UI interaction page makes it easy for everyone to control the meeting. CP925 has 7 built-in microphones, providing you with a clear and natural conference call experience.

### Modest Design, Easy-to-Use User Interface

Yealink CP925 is a hermit in the conference room. Its black acoustics fabric can realize crystal-clear audio and is resistant to water, oil, and stain. Its ultra-thin body, appropriate desktop fit, and ingenious hidden wiring slot, perfectly fit for the simple business style in the conference rooms. Additionally, its built-in Linux system and easy-to-use UI interface, allow users to launch a meeting with one button and increase user adoption.

### HD Audio, Smooth Communication

CP925 adopts Y-shaped design and has 6 built-in microphones for sound pickup and 1 micro-phone for noise cancellation. Its 20-foot and 360° omni-direction sound pickup provide users with clear and natural voice conference experience.

### AUDIO FEATURES

- Optimal HD audio
- Yealink Noise Proof Technology
- Smart Noise Filtering
- 20-foot (6-meter) microphone pickup range
- Apply to small to medium conference room
- Built-in 6-microphone array, 360-degree voice pickup
- Loudspeaker
  - Frequency: 100-20,000 Hz
  - Volume: 94dB at 0.5-m peak volume
- 56mm diameter and 5w speaker
- Full-duplex speakerphone with AEC
- Echo cancellation tail length is up to 320ms
- Background noise suppression
- Codecs: G726, G.729, PCMU (G.711A), PCMA (G.711μ)
- DTMF: In-band, Out-of-band (RFC 2833) and SIP INFO
- VAD, CNG, PLC, AJB, AGC

### PHONE FEATURES

- 1 SIP account
- Call hold, mute, DND, call recording, hotline
- 5-way conference call
- Redial, call waiting, emergency call
- Call forward, call transfer, call return, dial plan
- Ring tone selection/import/delete
- Set date time manually or automatically
- Volume adjustment
- Pairing via Bluetooth
- Active Speaker

### DIRECTORY

- Local phonebook up to 1000 entries
- XML/LDAP remote phonebook
- Intelligent search method
- Phonebook search/import/export
- Call history: dialed/received/missed/forwarded

### IP-PBX FEATURES

- Busy Lamp Field (BLF)
- Multicast paging
- Intercom
- Anonymous call

- Anonymous call rejection
- Voice mail
- Distinctive ringtone
- all pickup

### DISPLAY

- 4" 480x800 capacitive touch screen
- Volume key

### INTERFACE

- 1 x RJ45 10/100M Ethernet port
- Built-in Wi-Fi (2.4GHz/5GHz, 802.11a/b/g/n)
- Built-in Bluetooth 4.2
- Power over Ethernet (IEEE 802.3af), class 3
- 1 x USB 2.0 Type-C device port
- 1 x Security slot

### NETWORK AND SECURITY

- SIP v1 (RFC2543), v2 (RFC3261)
- SIP server redundancy supported
- IPv4/IPv6
- NAT traversal: STUN mode
- Proxy mode and peer-to-peer SIP link mode
- IP assignment: static/DHCP
- HTTP/HTTPS web server
- Time and date synchronization using SNTP
- UDP/TCP/DNS-SRV (RFC 3263)
- QoS: 802.1p/Q tagging (VLAN), Layer 3 ToS, DSCP
- SRTP for voice encryption
- Transport Layer Security (TLS1.3)
- HTTPS certificate manager
- AES encryption for configuration file (AES256)
- Adb encryption authenticated
- Digest authentication using MD5/MD5-sess
- OpenVPN, L2TP VPN
- WPA2/WPA3 • Secure boot
- GARP (Generic Attribute Registration Protocol)

### MANAGEMENT

- Configuration: browser/phone/auto-provision
- Auto provision via FTP/TFTP/HTTP/HTTPS for mass deploy
- Auto-provision with PnP
- Zero-sp-touch, TR-069
- Reset to factory, reboot
- Package tracing export, system log


### OTHER PHYSICAL FEATURES

- Color: Black
- External Yealink PoE adapter (optional)
- Power consumption (PSU): 3.5W-11W
- Power consumption (PoE): 4W-12W
- Dimension (W\*D\*H): 285mm\*289.5mm\*59.1mm
- Operating humidity: 10~90%
- Storage temperature: -10~40°C (+14~104°F)

### PACKAGE FEATURES

- Package content:
  - Yealink CP925 IP conference phone
  - Ethernet Cable (7.5m CAT5E UTP cable)
  - M2x5 screw
  - Screwdriver
  - Wireless Microphone CPW25 (Optional)
  - Quick Start Guide
  - Yealink PoE Adapter YLPOE30 (Optional)
- Qty/CTN: 5 PCS
- N.W/CTN: 7.036 kg
- G.W/CTN: 8.106 kg
- Giftbox size: 355mm\*349mm\*108mm
- Carton Meas: 567mm\*357mm\*365mm

### COMPLIANCE

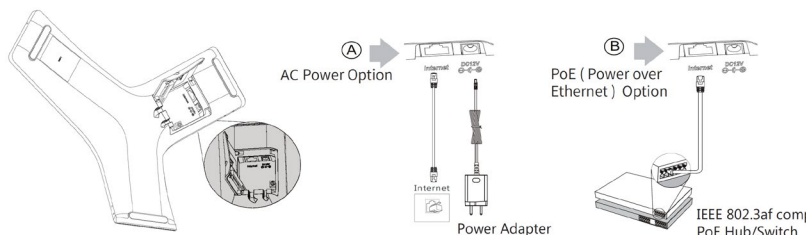

**J.D. Power 2020 Certified Assisted Technical Program**, developed in conjunction with TSIA. Based on successful completion of an audit and exceeding a customer satisfaction benchmark for assisted support operations. For more information, visit [www.jdpower.com](http://www.jdpower.com) or [www.tsia.com](http://www.tsia.com). Intermedia Unite, SecuriSync, VoIP Scout, AnyMeeting and HostPilot are either trademarks or registered trademarks of Intermedia.net, Inc. in the United States and/or other countries.

**Questions? Contact My Tel Pros today.**  
984-201-2000 | [sales@mytelpros.com](mailto:sales@mytelpros.com)  
[www.mytelpros.com](http://www.mytelpros.com)

